


MODEL: OT65-12 PLUS (VRLA GEL)/CD



Plane Chart:


Unit:(mm) Terminal type:(T3)

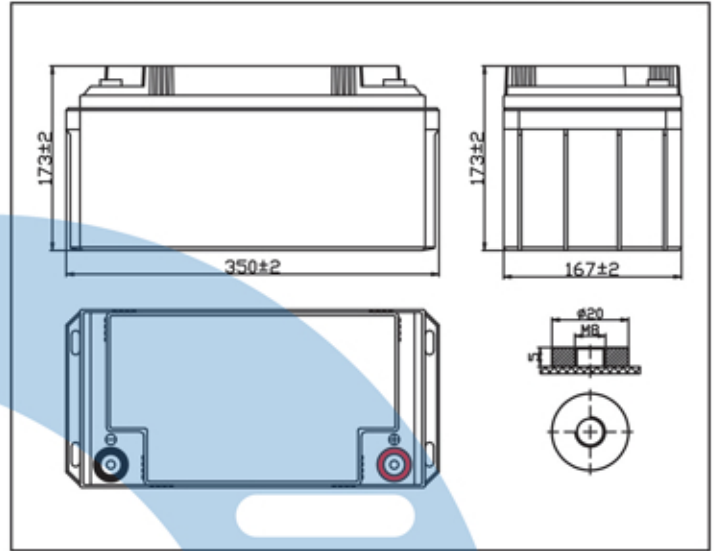


Parameter Chart:

Volts		12V
Capacity(25°C)	10 hours rate (6.5A)	65Ah
Discharge Current Testing (25°C)	1 hours rate (35.7A)	41Ah
	3 hours rate (16.2A)	50Ah
Internal Resistance	Full Charged Battery 25°C	6.5mΩ
Capacity Affected By Temperature	40°C	104%
	25°C	100%
	0°C	83%
	-15°C	65%
Residual Capacity (25°C)	Capacity After 3 Months Storage	91%
	Capacity After 6 Months Storage	82%
	Capacity After 12 Months Storage	65%
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 19.5A Voltage 14.5~14.9V
	Float (25°C)	Charge Voltage 13.6~13.8V
Weight (Approx)		20.6Kg

Residual Capacity

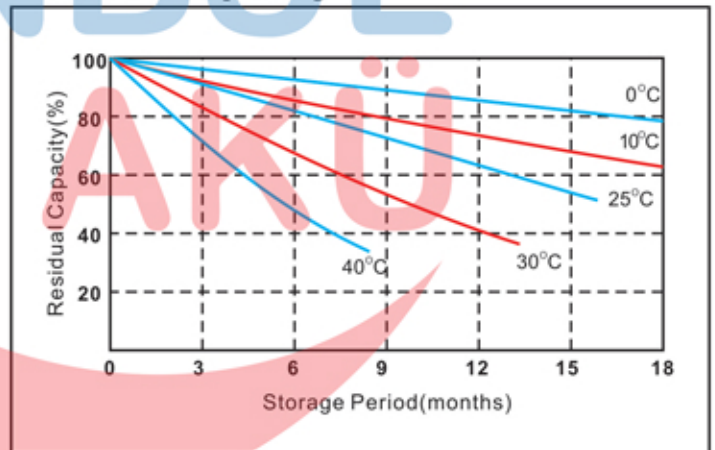


Discharge Current 25°C

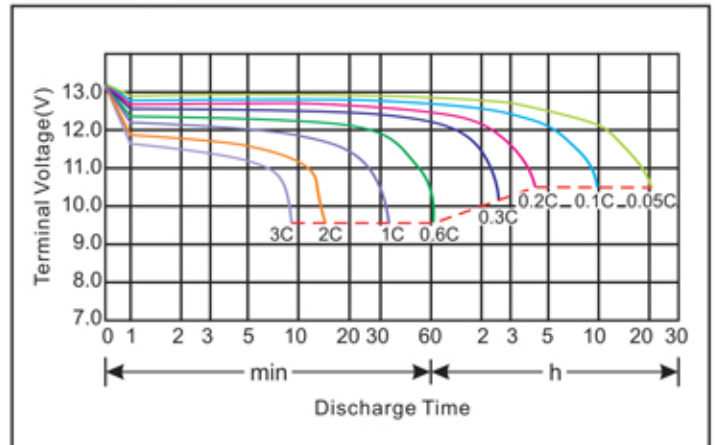


★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

MODEL: OT65-12 PLUS (VRLA GEL)/CD

Constant voltage charging characteristics

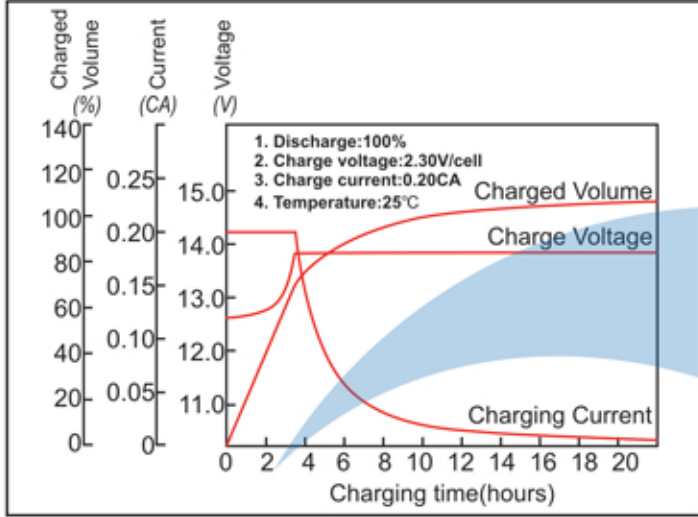

Cycle service life in relation to the depth of discharge

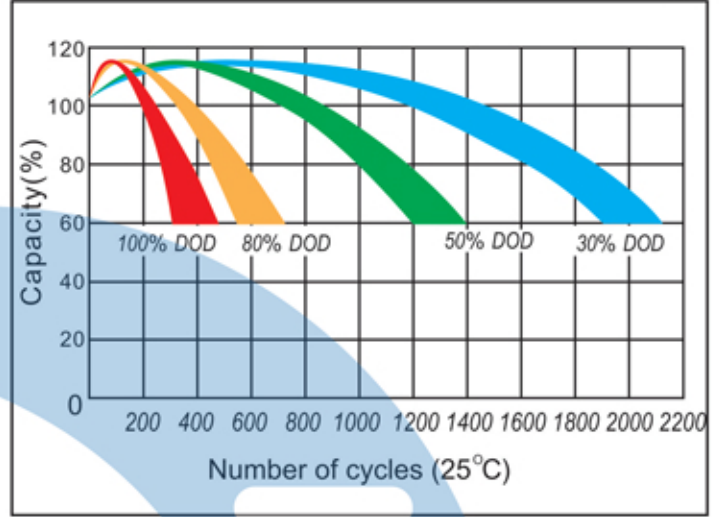

Constant Current Discharge Characteristics (A, 25°C)

F.V/Time	5min	10min	15min	30min	60min	2h	3h	5h	8h [®]	10h	20h
9.60V	207.6	143.3	110.2	67.1	41.1	23.7	16.7	11.7	7.9	6.7	3.5
10.2V	189.7	136.3	106.2	64.4	39.5	23.4	16.5	11.5	7.9	6.6	3.5
10.5V	173.6	128.9	103.2	63.1	38.6	23.2	16.3	11.4	7.8	6.5	3.4
10.8V	157.6	120.7	100.2	61.2	37.5	22.9	16.2	11.3	7.7	6.5	3.4

Constant Power Discharge Characteristics (Watt, 25°C)

F.V/Time	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60V	2179.8	1547.1	1210.4	753.5	467.9	274.5	196.4	138.3	94.1	79.6	41.9
10.2V	2048.8	1469.9	1161.3	723.4	449.9	270.5	194.4	136.3	93.3	79.0	41.5
10.5V	1909.6	1417.9	1132.3	707.4	438.9	268.5	192.4	135.3	92.8	78.1	41.1
10.8V	1765.1	1351.8	1104.2	687.4	426.9	265.5	191.4	134.3	91.9	77.8	40.9

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.